

Orona 3G

1010

Machine-room-less electrical gearless solutions (MRLG)

High efficiency for residential and low rise commercial developments.

Optimum use of space and latest direct drive (gearless) technology.

The base solution.

Latest technology, affordable and functional.

General specifications

Load	320-450-630 kg
Capacity	4-6-8 persons
Speed	1 m/s
Maximum travel	45 m
Maximum floors served	16 floors
Entrances	1 front / 2 open through / 2 front & side
Drive system	Direct gearless (180 starts per hour)
Controller	ARCA II controller, low energy microprocessor
Door types	Automatic side-opening / Automatic central-opening
Clear door opening	700 / 800 / 900
Door height	2,000 / 2,100
Car dimensions	Standard car dimensions
Internal car height	2,100 / 2,200
Aesthetic solutions	DR1 / DR2 / DR3 / DR4 / DR5 / DR6 / DR7 / DR8 DS1 / DS2 / DS3 / DS4 / DS5 / Orona 3G Domo Plus

Standard Optional



1 MRL

Compact machine-room-less solution, with optional reduced headroom version.



2 OPTIMISED PASSENGER UNIT

Saves space, reduces weight, improves safety, and improves the installation process.



3 ACCESSIBLE SPACE BELOW THE PIT

Adapts the lift to suit buildings which have an accessible space below the pit (optional).



4 TWO-WAY COMMUNICATIONS

Between the lift and the emergency 24-hour Service Call Centre according to EN 81-28.



5 TRACTION ROPES

Orona small diameter ropes replace traditional steel ropes. As a result of their lighter weight, longer lifespan and greater flexibility, it is possible to use a more compact, efficient and eco-friendly gearless machine.



6 DRIVE

Compact, quiet, gearless, energy efficient, speed regulated (VVVF) permanent magnet electric motor.



7 DOORS

Compact permanent magnet motor for fast, accurate and quiet door operation giving the most advanced performance. Advanced door opening and full height infrared door protection edges.



8 AUTOMATIC RESCUE SYSTEM

With floor level indication to ensure fast, efficient and safe evacuation of passengers in the event of an emergency. As an option, the system can incorporate a fully-automatic rescue device to evacuate passengers in the event of a power failure.



Standard dimensions

Load / Capacity		Car			Lift shaft *							
Persons	Q Load	AC Width	FC Depth	PL Clear opening	Entrances		Side-opening doors		Central-opening doors		HF Pit	HUP Last Floor
					Accessibility	No. of entrances	AH ¹ Width	FH ² Depth	AH Width	FH ³ Depth		
4	320 kg	825	1,100	700		1	1,325	1,350	1,600	1,300	1,000 (850) ⁴	3,400
						2 x 180 ⁰		1,500		1,400		
						2 x 90 ⁰	1,450	1,350				
6	450 kg	1,000	1,250	800	♿	1	1,500	1,500	1,800	1,450	1,000 (850) ⁴	3,400 (3,000) ⁵
						2 x 180 ⁰		1,650		1,550		
						2 x 90 ⁰	1,625	1,500		3,400		
8	630 kg	1,100	1,400	900	♿	1	1,600	1,650	2,000	1,600	1,000 (850) ⁴	3,400 (3,000) ⁵
						2 x 180 ⁰		1,800		1,700		
						2 x 90 ⁰	1,725	1,650				
		1,200	1,250	900	♿	1	1,700	1,500	2000	1,450		3,400
						2 x 180 ⁰		1,650		1,550		
						2 x 90 ⁰	1,825	1,575				


- 1 Accessible space below the pit (counterweight with safety gear) add 50 mm to AH
- 2 Shaft depth with door tracks projecting 60 mm on the landing
- 3 Shaft depth with door tracks projecting 40 mm on the landing

- 4 HF reduced pit optional 850 mm
- 5 Minimum HUP for internal car height (HC) of 2,100 mm (HUP = HC + 1,300)
HUP reduced headroom optional only for 6 and 8 persons (HUP = HC + 900)


* Minimum plumb measurements

Layout


1 ENTRANCE




2 ENTRANCES (OPEN THROUGH)

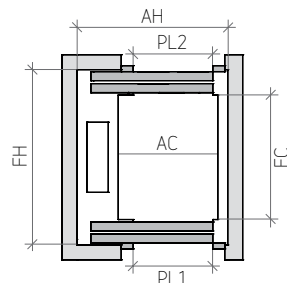


2 ENTRANCES (FRONT & SIDE)



VERTICAL SECTION

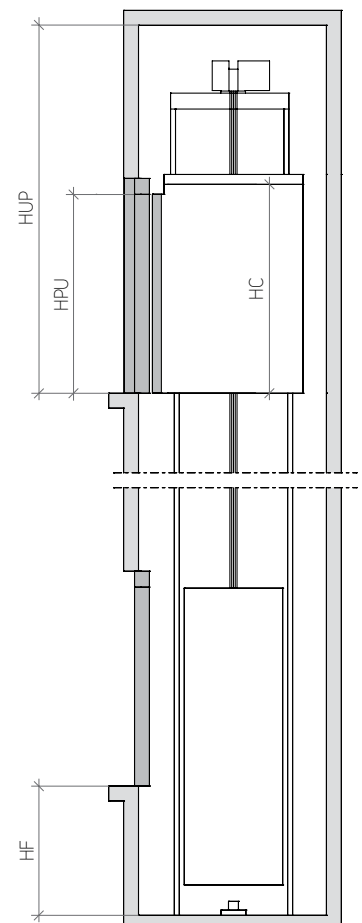


CONTROLLER DETAIL



Controller at the top floor:
420 x 165 mm
Optional locations available.

WIDE-FRAMED DOOR DETAIL



Orona 3G

1015


Machine-room-less electrical gearless solutions (MRLG)

High efficiency for residential and low rise commercial developments. Optimum use of space and latest direct drive (gearless) technology. The customised solution. Maximum flexibility and performance.

General specifications

Load	320 to 1,000 kg
Capacity	4 to 13 persons
Speed	1 - 1.6 m/s
Maximum travel	50 - 60 m
Maximum floors served	16 - 21 floors
Entrances	1 front / 2 open through
Drive system	Direct gearless
Controller	ARCA II controller, low energy microprocessor
Door types	Automatic side-opening / Automatic central-opening
Clear door opening	From 600 to 1,500 mm (in 100 mm increments)
Door height	2,000 / 2,100 / 2,200 / 2,300
Car dimensions	Parametric car dimensions
Internal car height	2,100 / 2,200 / 2,300 / 2,400
Aesthetic solutions	DR1 / DR2 / DR3 / DR4 / DR5 / DR6 / DR7 / DR8 DS1 / DS2 / DS3 / DS4 / DS5 / Orona 3G Domo Plus

Standard Optional

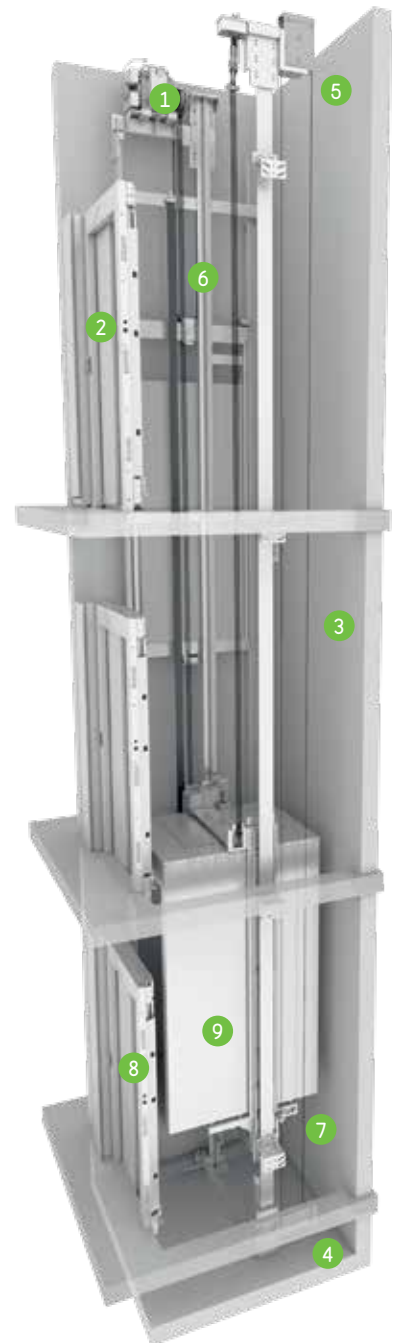

1 DRIVE

Compact, quiet, gearless, energy efficient, speed regulated (VVVF) permanent magnet electric motor.



2 DOORS

Compact permanent magnet motor for fast, accurate and quiet door operation giving the most advanced performance. Advanced door opening and photoelectric curtain. Optional Solid Door for high flow situations.



3 PARAMETRIC/ FLEXIBLE

Flexible car and door configurations ensure available shaft dimensions can be optimised (optional).



4 ACCESSIBLE SPACE BELOW THE PIT

Adapts the lift to suit buildings which have an accessible space below the pit (optional).



5 REDUCED HEADROOM

Optional feature to allow the reduction of the shaft headroom when required, whilst maintaining the maximum safety and protection for maintenance staff.



6 TRACTION ROPES

Orona small diameter ropes replace traditional steel ropes. As a result of their lighter weight, longer lifespan and greater flexibility, it is possible to use a more compact, efficient and eco-friendly gearless machine.



7 SHAFT USABILITY

Lifts designed especially to use all the shaft space available, obtaining a good relation between the space available and the number of passengers to be transported.



8 AUTOMATIC RESCUE SYSTEM

With floor level indication to ensure fast, efficient and safe evacuation of passengers in the event of an emergency. As an option, the system can incorporate a fully-automatic rescue device to evacuate passengers in the event of a power failure.



9 TWO-WAY COMMUNICATIONS

Between the lift and the emergency 24-hour Service Call Centre according to EN 81-28.



ECO-EFFICIENCY



ADAPTABILITY



DESIGN AND ACCESSIBILITY



CONTROL AND SAFETY

Reference Packs



DR1




DR2



DR3



DR4



DR5



DR6



DR7



DR8

Selection Packs



DS1



DS2



DS3



DS4



DS5

Orona 3G Domo Packs

REFERENCE PACKS

SELECTION PACKS

DR1 DR2 DR3 DR4 DR5 DR6 DR7 DR8 DS1 DS2 DS3 DS4 DS5

CEILING AND LIGHTING

MODEL	LED	UP17			•				•					
		UP19	•			•	•		•	•				
		UP23		•										
	LED Spots	UP31									•			
UP37		•	•	•	•	•	•	•	•	•	•	•	•	
	LED panel (200 x 200 mm)	UP41								•				
CEILING MATERIAL	ST01 St St Base		•	•	•	•	•	•	•	•	•	•	•	
	ST02 St St Plus		•	•	•	•	•	•	•	•	•	•	•	
OTHERS	Automatic lighting switch-off		•	•	•	•	•	•	•	•	•	•	•	
	Emergency hatch		•	•	•	•	•	•	•	•	•	•	•	
	Fan		•	•	•	•	•	•	•	•	•	•	•	

CAR WALLS

PANELS	Neocompact Colour	NC02 Red Autumn			•P								
		NC03 White Snow	•	•	•	•		•	•				•
		NC05 Blue Berry		•P									
		NC08 Yellow Sunset					•						
		NC09 Green Orona				•P						•	
	Neocompact Wood	NC11 Cherry Tree						•F			•		
		NC16 Linen Pure									•		
	Neocompact Texture	NC17 Grey Storm									•		
		NC18 Night Garden							•F				•F
		NC19 White Garden					•P					•P	
ST01 St St Base												•	
Panel Stainless	ST02 St St Plus											•	
	Without cladding (for local fit out)	•	•	•	•	•	•	•	•	•	•	•	
Others	Tip-up seat	•	•	•	•	•	•	•	•	•	•	•	
	2 Entrances or 'Through car' for 180, 'Front/Adjacent' for 90 & 270	•	•	•	•	•	•	•	•	•	•	•	
		•	•	•	•	•	•	•	•	•	•	•	

CAR OPERATING PANELS AND INDICATORS

CAR INDICATOR	7 Segment	•	•	•	•	•	•	•	•				
	Dot-matrix									•	•		•
	TFT											•	
	Car direction arrows	•	•	•	•	•	•	•	•	•	•	•	•
	Overload indicator (buzzer & light)	•	•	•	•	•	•	•	•	•	•	•	•
	Direction arrows on entrance return	•	•	•	•	•	•	•	•	•	•	•	•
	Car gong	•	•	•	•	•	•	•	•	•	•	•	•
	Voice synthesizer	•	•	•	•	•	•	•	•	•	•	•	•
	Inductive acoustic coupler	•	•	•	•	•	•	•	•	•	•	•	•
CAR OPERATING PANEL MATERIAL	ST01 St St Base	•	•	•	•	•	•	•	•	•	•	•	
	ST02 St St Plus	•	•	•	•	•	•	•	•	•	•	•	
CAR PUSH BUTTONS	Door close push button	•	•	•	•	•	•	•	•	•	•	•	
	Braille push button	•	•	•	•	•	•	•	•	•	•	•	
	Key switch push button (Standard or eurocylinder)	•	•	•	•	•	•	•	•	•	•	•	
	External call cancelling	•	•	•	•	•	•	•	•	•	•	•	
	Coded call	•	•	•	•	•	•	•	•	•	•	•	
LANDING INDICATOR	7 Segment	•	•	•	•	•	•	•	•	•	•	•	
	Dot-matrix									•	•	•	
	Next departure indicator	•	•	•	•	•	•	•	•	•	•	•	
	Landing gong	•	•	•	•	•	•	•	•	•	•	•	
LANDING PUSH BUTTONS	Key switch push button (Standard or eurocylinder)	•	•	•	•	•	•	•	•	•	•	•	
	Surface mounted push buttons	•	•	•	•	•	•	•	•	•	•	•	

MIRRORS

MIRRORS	MH (Mirror 1/2)	•F	•F	•F	•F	•F	•F	•F	•F				
	MT (Mirror 3/4 narrow)									•F	•F	•F	•F
FINISH	Rear-view mirror (EN 81-70)	•	•	•	•	•	•	•	•	•	•	•	•
	O1 Clear	•	•	•	•	•	•	•	•	•	•	•	•

HANDRAILS

HANDRAILS	HR01 (Aluminium tube)	•L	•L	•L	•L	•L	•L	•L	•L				
	HR02 (Aluminium tube)									•F/L	•F/L		•F/L
	HR04 (Stainless steel tube)											•F/L	•F/L

FINISHES

SKIRTINGS	SK01 Anodized Aluminium (St St finish)	•	•	•	•	•	•	•	•	•	•	•	•
DOOR MATERIALS (car and landing)	ST01 St St Base	•	•	•	•	•	•	•	•	•	•	•	•
	ST02 St St Plus	•	•	•	•	•	•	•	•	•	•	•	•
	Primed sheet (landing door)	•	•	•	•	•	•	•	•	•	•	•	•
DOOR PANEL TYPE	Standard panel (not big vision)	•	•	•	•	•	•	•	•	•	•	•	

FLOORS

SC-PVC HIGH	SC03 Grey Ice		•		•						•		
	SC04 Grey Storm					•		•			•		•
	SC05 Grey Silver	•		•					•				•
	SC06 Beige Sand						•						
OTHERS	Prepared for granite	•	•	•	•	•	•	•	•	•	•	•	•
	Prepared for PVC	•	•	•	•	•	•	•	•	•	•	•	•

Reference Packs



PR1



PR2



PR3



PR4



PR5

Selection Packs



PS1



PS2



PS3



PS4



PS5



PS6



PS7



PS8



PS9

Orona 3G Public Packs

REFERENCE PACKS

SELECTION PACKS

PR1 PR2 PR3 PR4 PR5 PS1 PS2 PS3 PS4 PS5 PS6 PS7 PS8 PS9

CEILINGINGS AND LIGHTING

MODEL	LED Spots	UP31	•	•														
		UP37	○	○	•	○	•	○	○	○	○	○	○	○	○	○	○	○
	LED Panel (200 x 200 mm)	UP41				•			•					•				
		UP43						•		•					•	•		
	LED Panel (600 x 600 mm)	UP47									•							
		UP53										•						•
CEILING MATERIAL	ST01 St St Base		•	•	•	•	•	○	○	○	○	○	○	○	○	○	○	○
	ST02 St St Plus		○	○	○	○	○	○	•	•	•	•	•	•	•	•	•	•
OTHERS	Automatic lighting switch-off		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Emergency hatch		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Fan		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

CAR WALLS

PANELS	Neocompact Colour	NC03 White Snow		•				•P	•		•P		•P						
		NC05 Blue Berry				•P									•L				
		NC09 Green Orona			•										•				
	Neocompact Wood	NC11 Cherry Tree		•															
		NC12 Wood Sinatra							•	•F									
	Neocompact Texture	NC16 Linen Pure									•								
		NC18 Night Garden				•P						•	•P						
		NC19 White Garden		•F															
	Panel Stainless	ST01 St St Base				•	•						○		○	○	○	○	○
		ST02 St St Plus				○	○						•		•	•	•	•	•
	Others	Without cladding (for local fit out)		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		Tip-up seat		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
2 Entrances or 'Through car' for 180, 'Front/Adjacent' for 90&270			○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

CAR OPERATING PANELS AND INDICATORS

CAR INDICATOR	Dot-matrix		•	•	•	•	•												
	TFT							•	•	•	•	•	•	•	•	•	•	•	
	Car direction arrows		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	Overload indicator (buzzer & light)		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	Direction arrows on entrance return		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	Car gong		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Voice synthesizer		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
CAR OPERATING PANEL MATERIAL	Inductive acoustic coupler		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	ST01 St St Base		•	•	•	•	•	○	○	○	○	○	○	○	○	○	○	○	
	ST02 St St Plus		○	○	○	○	○	○	•	•	•	•	•	•	•	•	•	•	
CAR PUSH BUTTONS	Door close push button		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	Braille push button		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	Key switch push button (Standard or eurocylinder)		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	External call cancelling		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	Coded call		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
LANDING INDICATOR	7 Segment		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	Dot-matrix		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	Next lift indicator		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	Landing gong		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
LANDING PUSH BUTTONS	Key switch push button (Standard or eurocylinder)		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	Wall mounted push buttons		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

MIRRORS

MIRRORS	MT (Mirror 3/4 narrow)		•F	•F	•F	•F	•F	•F	•F	•F	•F	•F	•F				•F	
	MW (Mirror 3/4 wide)																•F	•F
FINISH	Rear-view mirror (EN 81-70)		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	01 Clear		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

HANDRAILS

	HR04 (Stainless steel pipe)		•L	•L	•L	•L	•L	•L	•F/L	•F/L	•F/L	•F/L	•F/L	•F/L	•L	•F/L	•L
--	-----------------------------	--	----	----	----	----	----	----	------	------	------	------	------	------	----	------	----

FINISHES

SKIRTINGS	SK01 Anodized Aluminium (St St finish)		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DOOR MATERIAL (car and landing)	ST01 St St Base		•	•	•	•	•	○	○	○	○	○	○	○	○	○	○	○
	ST02 St St Plus		○	○	○	○	○	○	•	•	•	•	•	•	•	•	•	•
	Primed sheet (landing door)		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
DOOR PANEL TYPE	Standard panel (not big vision)		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

FLOORS

SC-PVC HIGH	SC01 Red Cherry																	
	SC03 Grey Ice							•		•								
	SC04 Grey Storm		•	•				•		•								
	SC05 Grey Silver				•	•												
	SC06 Beige Sand																	•
OTHERS	Prepared for granite		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Prepared for PVC		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○